




Compact Fluorescent

**6" Dome Shower Light
Single Lamp
IC & Non-IC**

Recessed

Type _____
-60
P8025

Catalog No.	Finish	Dimensions (Inches)	
	White Polycarbonate	A	B
P8025	-60	8-1/4	2

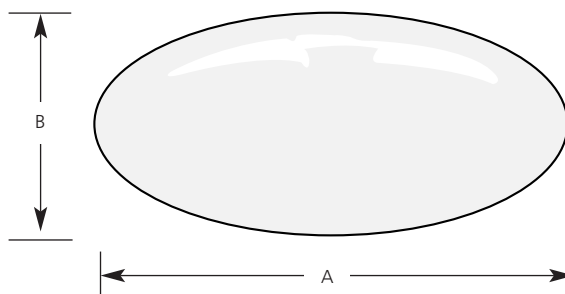

Lamp Wattage

Housing	IC	Non-IC
P62-FB	NA	26 or 32w 4-pin Triple-tube CF
P83-AT	13w 4-pin Triple-tube CF	13w 4-pin Triple-tube CF
P83-ICAT	13w 4-pin Quad/Triple-tube CF	13w 4-pin Quad/Triple-tube CF
P83-26ICAT	26w 4-pin Triple-tube CF	26w 4-pin Triple-tube CF
P88-ICAT	18w 4-pin Quad/Triple-tube CF	18w 4-pin Quad/Triple-tube CF
P183-EB	13w 4-pin Triple-tube CF	13w 4-pin Triple-tube CF

Specifications:

Flange

- None

Trim

- Trim-Lok action for trim retention forces trim to fit snugly against the ceiling
- Socket mounts to trim for optimum performance and consistent lamp position
- No light leaks around lens edge
- Full aluminum interior reflector

Lens

- Polycarbonate diffuser: 8-1/4" dia. x 5-3/4" OD neck

Lamps

- Maximum overall length of lamp cannot exceed 5.3" (5-1/4")
- Available are: GE -F26TBX, or Progress 7808-01 (26w)

Labels

- UL-CUL wet location listed


Progress Lighting
701 Millennium Blvd.
Greenville, South Carolina
29607

www.progresslighting.com
Patent# 5,758,973

Rev. 7/09

Type _____
-60
P8025

Catalog No.	Finish White Polycarbonate	Dimensions (Inches)	
		A	B
P8025	-60	8-1/4	2

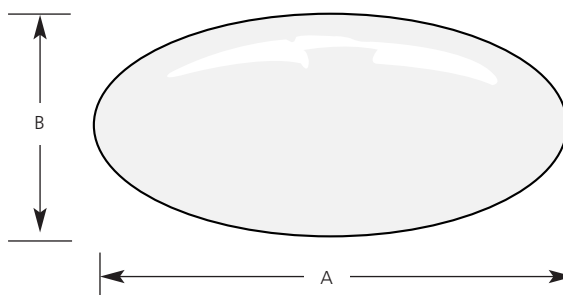

<u>Lamp Wattage</u> Housing	IC	Non-IC
P87-AT	40A19	75A19
P87-ATQC	40A19	75A19
P187-TG	40A19	75A19
P821-AT	60A19	60A19
P821-FB, P821-FBFC	N/A	60A19

Specifications:

Flange

- None

Trim

- Trim-Lok action for trim retention forces trim to fit snugly against the ceiling
- Socket mounts to trim for optimum performance and consistent lamp position
- No light leaks around lens edge
- Full aluminum interior reflector

Lens

- Polycarbonate diffuser: 8-1/4" dia. x 5-3/4" OD neck

Labels

- UL-CUL wet location listed

